

# IK 3


## When service meets design

- Up to 3 joysticks or 6 paddles
- Multiband radio with full-duplex communication
- Highly customizable
- 3.5" color TFT display
- External removable EEPROM SIM module
- Easy and fast maintenance
- High resistance to impacts
- Innovative ergonomics
- Non-slip handles
- Frequency management against interferences

## Specifications

Transmitter	IK 3
Stop function	Cat. 3 - PLd
Ingress protection	IP65/NEMA4
Anti-condensation system	Goretex film
Frequency band	Multiband (400-930 MHz)
Main mechanisms (max. #)	Joystick (3)/paddle (6)
Auxiliary mechanisms	Push-button, toggle and rotary switches
Removable EEPROM	External
Battery model	BT27IK
Battery life	16 hours
Operating temperature range	-20° C + 70° C (-4° F + 158° F)
Weight (with battery) grams	1780
Harness	Belt/shoulder strap
Display	3.5" Color TFT
Cable connection	Yes (M12 connector)
Range limiter	Yes
Associated receivers	R13/R70/R70PLUS/MPCAN/MP20

Associated applications:

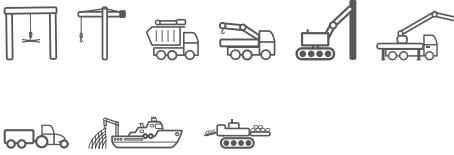

External removable  
EEPROM SIM  
module

**ikontrol**