




R13



R13

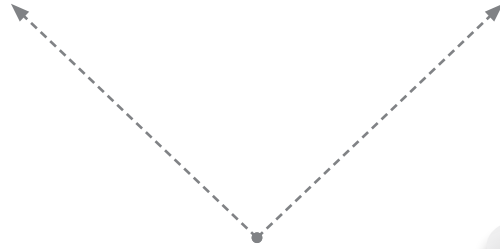

T70 2



IK 3



COMPLIES
WITH
EN15011: 2011
STANDARD

TWIN SYNCHRO

The most compact
TANDEM solution

Characteristics

- Multiband Radio with Full-Duplex communication
- External Display for troubleshooting
- Highly field-customizable TANDEM solution
- External EEPROM SIM module
- Frequencies management against interferences
- STOP: PLd, Category 3 according to EN ISO 13849-1:2008
- Easy and fast maintenance
- Multi-feedback capability
- 13 digital outputs
- Up to 24 signals to interchange between receivers

Specifications

Receiver	TWIN SYNCHRO
Stop Function	Cat. 3 - PLd
Ingress Protection	IP65/NEMA4
Frequency Band	Multiband (400 - 930 MHz)
AC Power Supply	48 - 230 Vac (Multivoltage)
DC Power Supply	na
Antenna	External/Internal
Removable EEPROM	External
Signalling	External
ON/OFF outputs (Max.)	13
Analogue Outputs (Max.)	na
CANOpen, Profibus-DP, SAE J1939	na
ON/OFF inputs (Max.)	24
Analogue Inputs (Max.)	na
Maximum output Current	8A
Working Temperature Range	-20C +70C (-4F +158F)
Weight (gr)	Config dependable
Dimensions (LxWxH mm)	245x160x80
Cable connection	na
Associated Transmitters	T70/1, T70/2, IK2, IK3, IK4, T70/1HALL, T70/2HALL, T70/1 ATEX, T70/2ATEX



HEADQUARTERS

IKUSI - Ángel Iglesias S.A. · Pº Miramón, 170 · 20014 San Sebastián · SPAIN
Tel.: +34 943 44 88 00 · Fax: +34 943 44 88 20 · tlc@ikusi.com · www.ikusitlc.com/en

IKUSI WORLDWIDE

AUSTRALIA/NEW ZEALAND · CHILE · COLOMBIA · FRANCE · GERMANY · INDIA · MEXICO · SPAIN · UNITED ARAB EMIRATES



Leading Brands of Spain Forum